


Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Gold – Dark Grey RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	G
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	3
Lumen:	360
Real Lumen:	120
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	IP 54
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut


Available light beams: 15°, 30°, 60°, adjustable with removable masks.



Dodo 60

LL14301ZN


Lombardo.

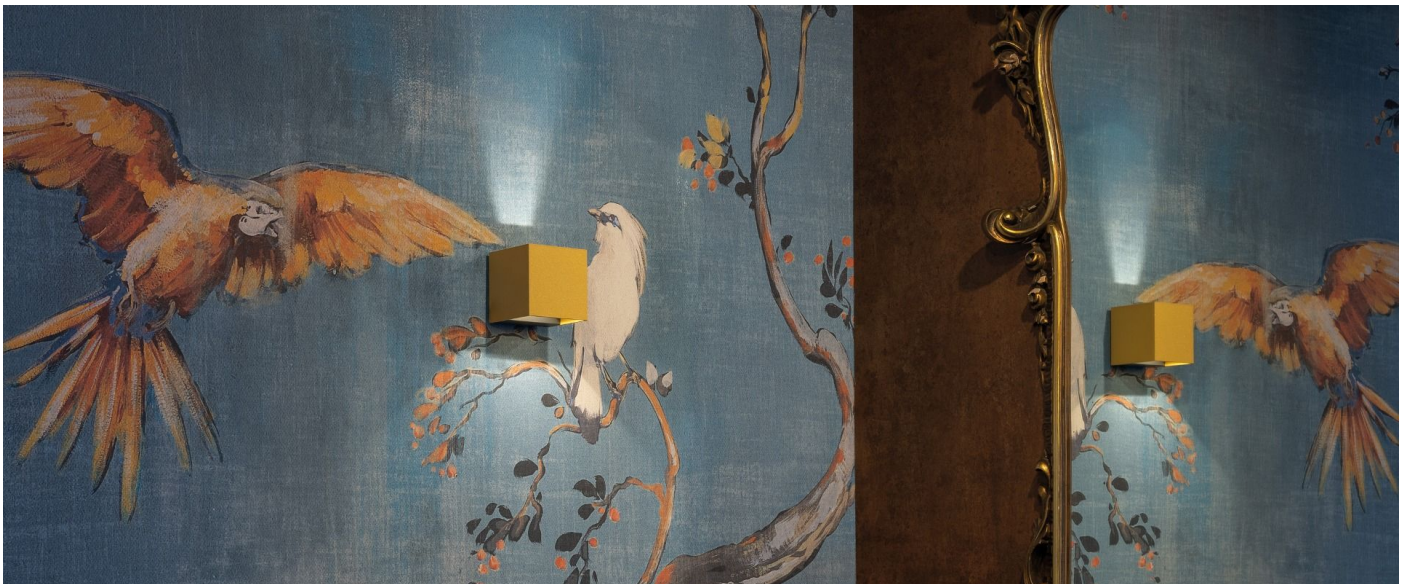


Installation images:




Lighting simulation:

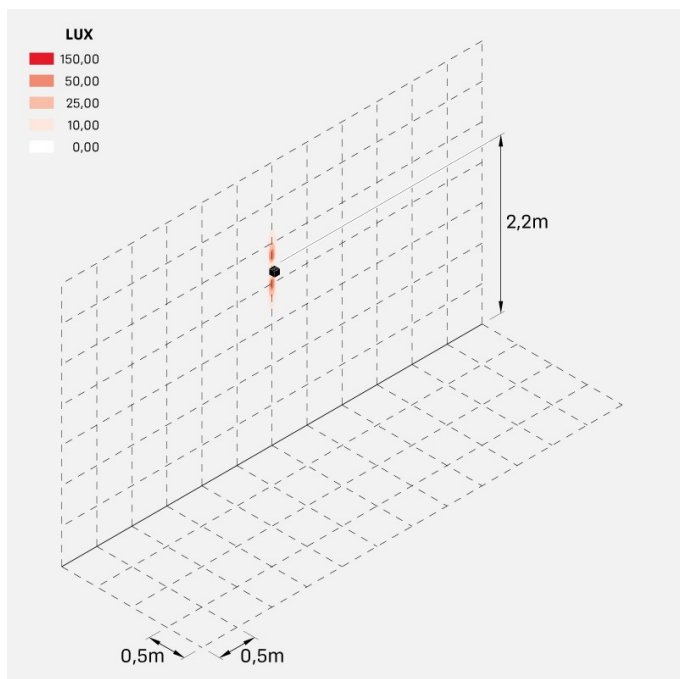

dodo_60_15

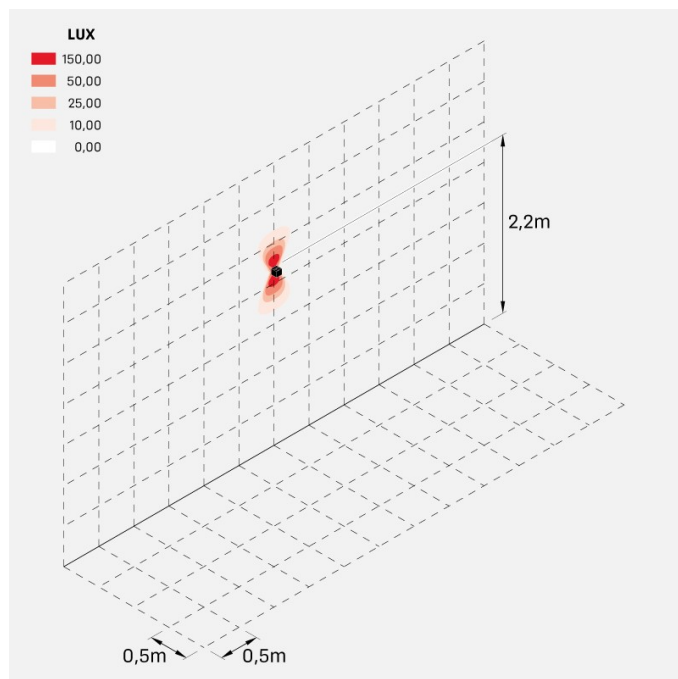

dodo_60_30

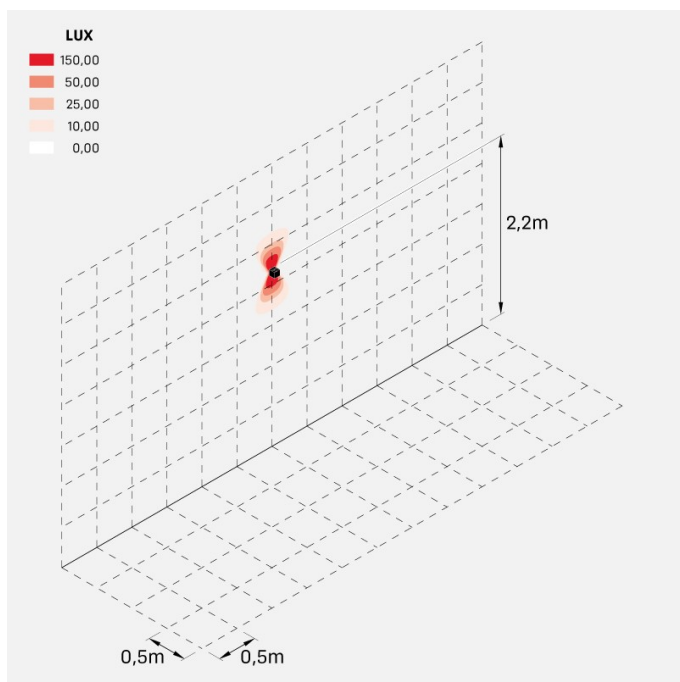

dodo_60_60

Photometric curves:

